

Cable Tray and Modules



INFO



Photo shows a configuration example with equipment not included in the scope of supply.

General Product Specifications

Material & Surface finish:

- C = Powder coating
- P = Pre-galvanized
- H = Hot Dip galvanization
- S = Stainless steel

Colour for C class :

- Normal RAL 7035 (Standard)
- Special RAL 7032



Also required for S class


Note: Special material can be stainless steel

- Enclosure: Stainless steel 1.4301(AISI 1.5 ,304 mm)
- Door or double door and console lid: Stainless steel 1.4301(AISI 2.0 ,304 mm)


Technical Information

Sample code for product :


CP-050410-B

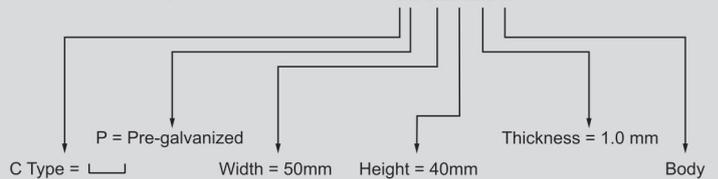


Cable Tray and Modules

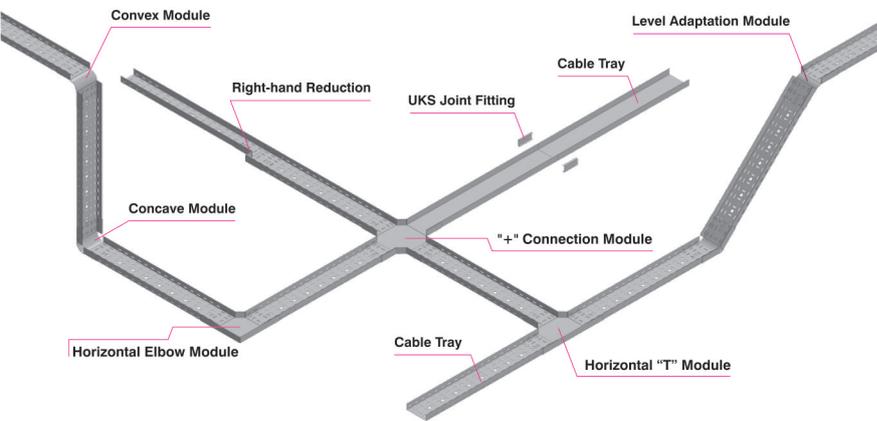

Cable Ladder and Modules

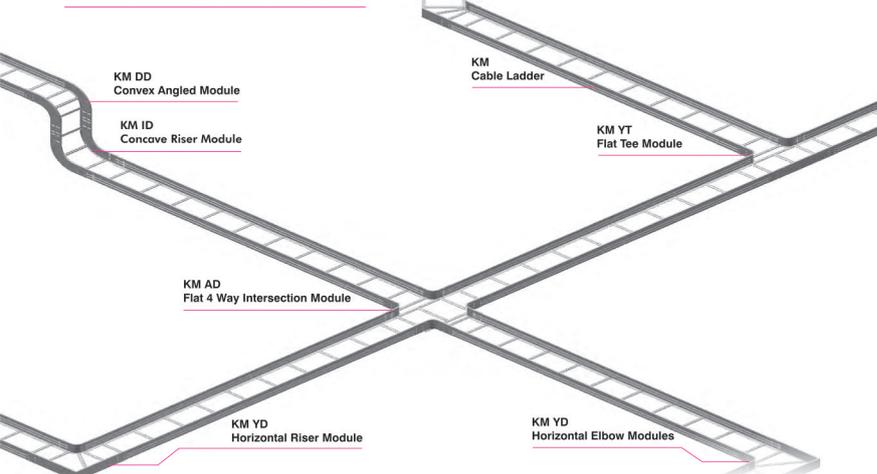

Catalogue Number Explanation

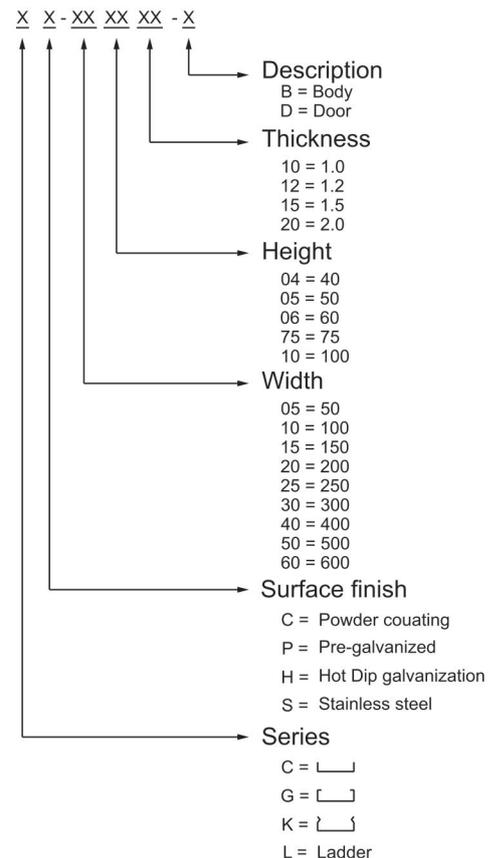

Cable Tray Systems

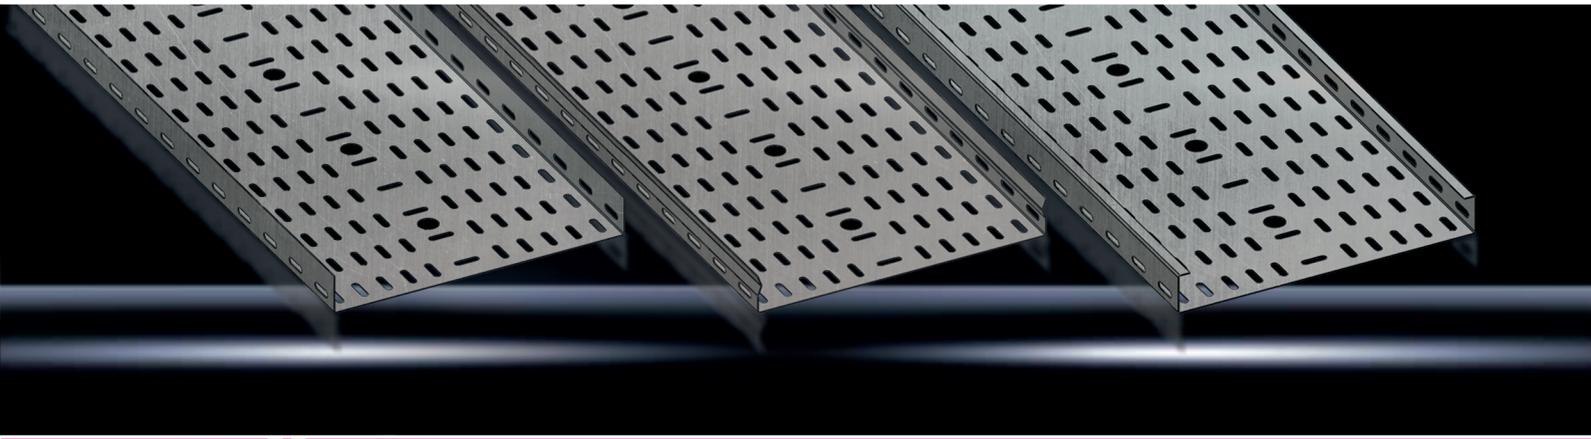


Photo shows a configuration example with equipment not included in the scope of supply.

Length ▼	NSP			C type		G type		K type		
	L (mm)	W (mm)	H (mm)	T (mm)	Body	Door	Body	Door	Body	Door
					C type		G type		K type	
Normal : 2000 mm (Standard) Special : 3000 mm	50	40	40	1	CX-050410-B	CX-050410-D	GX-050410-B	GX-050410-D	KX-050410-B	KX-050410-D
	100	40	40	1	CX-100410-B	CX-100410-D	GX-100410-B	GX-100410-D	KX-100410-B	KX-100410-D
	150	40	40	1	CX-150410-B	CX-150410-D	GX-150410-B	GX-150410-D	KX-150410-B	KX-150410-D
	200	40	40	1	CX-200410-B	CX-200410-D	GX-200410-B	GX-200410-D	KX-200410-B	KX-200410-D
	250	40	40	1	CX-250410-B	CX-250410-D	GX-250410-B	GX-250410-D	KX-250410-B	KX-250410-D
	300	40	40	1	CX-300410-B	CX-300410-D	GX-300410-B	GX-300410-D	KX-300410-B	KX-300410-D
	400	40	40	1	CX-400410-B	CX-400410-D	GX-400410-B	GX-400410-D	KX-400410-B	KX-400410-D
	500	40	40	1	CX-500410-B	CX-500410-D	GX-500410-B	GX-500410-D	KX-500410-B	KX-500410-D
	600	40	40	1	CX-600410-B	CX-600410-D	GX-600410-B	GX-600410-D	KX-600410-B	KX-600410-D
Normal : 2000 mm (Standard) Special : 3000 mm	50	40	40	1.2	CX-050412-B	CX-050412-D	GX-050412-B	GX-050412-D	KX-050412-B	KX-050412-D
	100	40	40	1.2	CX-100412-B	CX-100412-D	GX-100412-B	GX-100412-D	KX-100412-B	KX-100412-D
	150	40	40	1.2	CX-150412-B	CX-150412-D	GX-150412-B	GX-150412-D	KX-150412-B	KX-150412-D
	200	40	40	1.2	CX-200412-B	CX-200412-D	GX-200412-B	GX-200412-D	KX-200412-B	KX-200412-D
	250	40	40	1.2	CX-250412-B	CX-250412-D	GX-250412-B	GX-250412-D	KX-250412-B	KX-250412-D
	300	40	40	1.2	CX-300412-B	CX-300412-D	GX-300412-B	GX-300412-D	KX-300412-B	KX-300412-D
	400	40	40	1.2	CX-400412-B	CX-400412-D	GX-400412-B	GX-400412-D	KX-400412-B	KX-400412-D
	500	40	40	1.2	CX-500412-B	CX-500412-D	GX-500412-B	GX-500412-D	KX-500412-B	KX-500412-D
	600	40	40	1.2	CX-600412-B	CX-600412-D	GX-600412-B	GX-600412-D	KX-600412-B	KX-600412-D
Normal : 2000 mm (Standard) Special : 3000 mm	50	40	40	1.5	CX-050415-B	CX-050415-D	GX-050415-B	GX-050415-D	KX-050415-B	KX-050415-D
	100	40	40	1.5	CX-100415-B	CX-100415-D	GX-100415-B	GX-100415-D	KX-100415-B	KX-100415-D
	150	40	40	1.5	CX-150415-B	CX-150415-D	GX-150415-B	GX-150415-D	KX-150415-B	KX-150415-D
	200	40	40	1.5	CX-200415-B	CX-200415-D	GX-200415-B	GX-200415-D	KX-200415-B	KX-200415-D
	250	40	40	1.5	CX-250415-B	CX-250415-D	GX-250415-B	GX-250415-D	KX-250415-B	KX-250415-D
	300	40	40	1.5	CX-300415-B	CX-300415-D	GX-300415-B	GX-300415-D	KX-300415-B	KX-300415-D
	400	40	40	1.5	CX-400415-B	CX-400415-D	GX-400415-B	GX-400415-D	KX-400415-B	KX-400415-D
	500	40	40	1.5	CX-500415-B	CX-500415-D	GX-500415-B	GX-500415-D	KX-500415-B	KX-500415-D
	600	40	40	1.5	CX-600415-B	CX-600415-D	GX-600415-B	GX-600415-D	KX-600415-B	KX-600415-D
Normal : 2000 mm (Standard) Special : 3000 mm	50	40	40	2	CX-050420-B	CX-050420-D	GX-050420-B	GX-050420-D	KX-050420-B	KX-050420-D
	100	40	40	2	CX-100420-B	CX-100420-D	GX-100420-B	GX-100420-D	KX-100420-B	KX-100420-D
	150	40	40	2	CX-150420-B	CX-150420-D	GX-150420-B	GX-150420-D	KX-150420-B	KX-150420-D
	200	40	40	2	CX-200420-B	CX-200420-D	GX-200420-B	GX-200420-D	KX-200420-B	KX-200420-D
	250	40	40	2	CX-250420-B	CX-250420-D	GX-250420-B	GX-250420-D	KX-250420-B	KX-250420-D
	300	40	40	2	CX-300420-B	CX-300420-D	GX-300420-B	GX-300420-D	KX-300420-B	KX-300420-D
	400	40	40	2	CX-400420-B	CX-400420-D	GX-400420-B	GX-400420-D	KX-400420-B	KX-400420-D
	500	40	40	2	CX-500420-B	CX-500420-D	GX-500420-B	GX-500420-D	KX-500420-B	KX-500420-D
	600	40	40	2	CX-600420-B	CX-600420-D	GX-600420-B	GX-600420-D	KX-600420-B	KX-600420-D

Note: X refers to C: power Coated, P: pregalvanized, H: Hot dip galvanization, S: Stainless steel

Cable Tray Systems

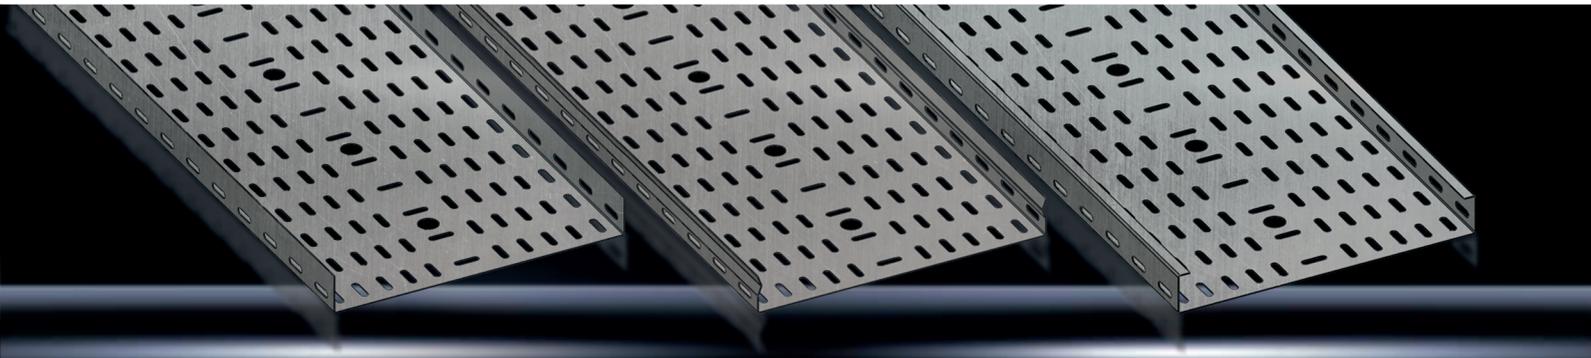


Photo shows a configuration example with equipment not included in the scope of supply.

Length ▼	NSP			C type		G type		K type		
	L (mm)	W (mm)	H (mm)	T (mm)	C type		G type		K type	
					Body	Door	Body	Door	Body	Door
Normal : 2000 mm (Standard) Special : 3000 mm	50	50	1	CX-050510-B	CX-050510-D	GX-050510-B	GX-050510-D	KX-050510-B	KX-050510-D	
	100	50	1	CX-100510-B	CX-100510-D	GX-100510-B	GX-100510-D	KX-100510-B	KX-100510-D	
	150	50	1	CX-150510-B	CX-150510-D	GX-150510-B	GX-150510-D	KX-150510-B	KX-150510-D	
	200	50	1	CX-200510-B	CX-200510-D	GX-200510-B	GX-200510-D	KX-200510-B	KX-200510-D	
	250	50	1	CX-250510-B	CX-250510-D	GX-250510-B	GX-250510-D	KX-250510-B	KX-250510-D	
	300	50	1	CX-300510-B	CX-300510-D	GX-300510-B	GX-300510-D	KX-300510-B	KX-300510-D	
	400	50	1	CX-400510-B	CX-400510-D	GX-400510-B	GX-400510-D	KX-400510-B	KX-400510-D	
	500	50	1	CX-500510-B	CX-500510-D	GX-500510-B	GX-500510-D	KX-500510-B	KX-500510-D	
	600	50	1	CX-600510-B	CX-600510-D	GX-600510-B	GX-600510-D	KX-600510-B	KX-600510-D	
Normal : 2000 mm (Standard) Special : 3000 mm	50	50	1.2	CX-050512-B	CX-050512-D	GX-050512-B	GX-050512-D	KX-050512-B	KX-050512-D	
	100	50	1.2	CX-100512-B	CX-100512-D	GX-100512-B	GX-100512-D	KX-100512-B	KX-100512-D	
	150	50	1.2	CX-150512-B	CX-150512-D	GX-150512-B	GX-150512-D	KX-150512-B	KX-150512-D	
	200	50	1.2	CX-200512-B	CX-200512-D	GX-200512-B	GX-200512-D	KX-200512-B	KX-200512-D	
	250	50	1.2	CX-250512-B	CX-250512-D	GX-250512-B	GX-250512-D	KX-250512-B	KX-250512-D	
	300	50	1.2	CX-300512-B	CX-300512-D	GX-300512-B	GX-300512-D	KX-300512-B	KX-300512-D	
	400	50	1.2	CX-400512-B	CX-400512-D	GX-400512-B	GX-400512-D	KX-400512-B	KX-400512-D	
	500	50	1.2	CX-500512-B	CX-500512-D	GX-500512-B	GX-500512-D	KX-500512-B	KX-500512-D	
	600	50	1.2	CX-600512-B	CX-600512-D	GX-600512-B	GX-600512-D	KX-600512-B	KX-600512-D	
Normal : 2000 mm (Standard) Special : 3000 mm	50	50	1.5	CX-050515-B	CX-050515-D	GX-050515-B	GX-050515-D	KX-050515-B	KX-050515-D	
	100	50	1.5	CX-100515-B	CX-100515-D	GX-100515-B	GX-100515-D	KX-100515-B	KX-100515-D	
	150	50	1.5	CX-150515-B	CX-150515-D	GX-150515-B	GX-150515-D	KX-150515-B	KX-150515-D	
	200	50	1.5	CX-200515-B	CX-200515-D	GX-200515-B	GX-200515-D	KX-200515-B	KX-200515-D	
	250	50	1.5	CX-250515-B	CX-250515-D	GX-250515-B	GX-250515-D	KX-250515-B	KX-250515-D	
	300	50	1.5	CX-300515-B	CX-300515-D	GX-300515-B	GX-300515-D	KX-300515-B	KX-300515-D	
	400	50	1.5	CX-400515-B	CX-400515-D	GX-400515-B	GX-400515-D	KX-400515-B	KX-400515-D	
	500	50	1.5	CX-500515-B	CX-500515-D	GX-500515-B	GX-500515-D	KX-500515-B	KX-500515-D	
	600	50	1.5	CX-600515-B	CX-600515-D	GX-600515-B	GX-600515-D	KX-600515-B	KX-600515-D	
Normal : 2000 mm (Standard) Special : 3000 mm	50	50	2	CX-050520-B	CX-050520-D	GX-050520-B	GX-050520-D	KX-050520-B	KX-050520-D	
	100	50	2	CX-100520-B	CX-100520-D	GX-100520-B	GX-100520-D	KX-100520-B	KX-100520-D	
	150	50	2	CX-150520-B	CX-150520-D	GX-150520-B	GX-150520-D	KX-150520-B	KX-150520-D	
	200	50	2	CX-200520-B	CX-200520-D	GX-200520-B	GX-200520-D	KX-200520-B	KX-200520-D	
	250	50	2	CX-250520-B	CX-250520-D	GX-250520-B	GX-250520-D	KX-250520-B	KX-250520-D	
	300	50	2	CX-300520-B	CX-300520-D	GX-300520-B	GX-300520-D	KX-300520-B	KX-300520-D	
	400	50	2	CX-400520-B	CX-400520-D	GX-400520-B	GX-400520-D	KX-400520-B	KX-400520-D	
	500	50	2	CX-500520-B	CX-500520-D	GX-500520-B	GX-500520-D	KX-500520-B	KX-500520-D	
	600	50	2	CX-600520-B	CX-600520-D	GX-600520-B	GX-600520-D	KX-600520-B	KX-600520-D	

Note: X refers to C: power Coated, P: pregalvanized, H: Hot dip galvanization, S: Stainless steel

Cable Tray Systems

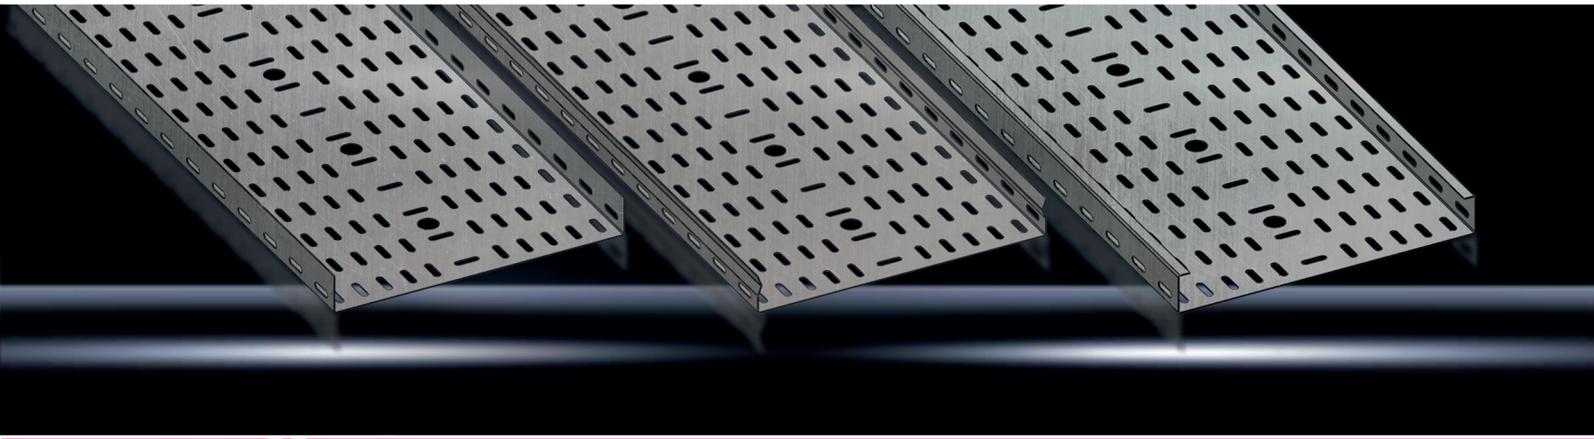


Photo shows a configuration example with equipment not included in the scope of supply.

Length ▼	NSP			C type		G type		K type		
	L (mm)	W (mm)	H (mm)	T (mm)	C type		G type		K type	
					Body	Door	Body	Door	Body	Door
Normal : 2000 mm (Standard) Special : 3000 mm	50	60	1	CX-050610-B	CX-050610-D	GX-050610-B	GX-050610-D	KX-050610-B	KX-050610-D	
	100	60	1	CX-100610-B	CX-100610-D	GX-100610-B	GX-100610-D	KX-100610-B	KX-100610-D	
	150	60	1	CX-150610-B	CX-150610-D	GX-150610-B	GX-150610-D	KX-150610-B	KX-150610-D	
	200	60	1	CX-200610-B	CX-200610-D	GX-200610-B	GX-200610-D	KX-200610-B	KX-200610-D	
	250	60	1	CX-250610-B	CX-250610-D	GX-250610-B	GX-250610-D	KX-250610-B	KX-250610-D	
	300	60	1	CX-300610-B	CX-300610-D	GX-300610-B	GX-300610-D	KX-300610-B	KX-300610-D	
	400	60	1	CX-400610-B	CX-400610-D	GX-400610-B	GX-400610-D	KX-400610-B	KX-400610-D	
	500	60	1	CX-500610-B	CX-500610-D	GX-500610-B	GX-500610-D	KX-500610-B	KX-500610-D	
	600	60	1	CX-600610-B	CX-600610-D	GX-600610-B	GX-600610-D	KX-600610-B	KX-600610-D	
Normal : 2000 mm (Standard) Special : 3000 mm	50	60	1.2	CX-050612-B	CX-050612-D	GX-050612-B	GX-050612-D	KX-050612-B	KX-050612-D	
	100	60	1.2	CX-100612-B	CX-100612-D	GX-100612-B	GX-100612-D	KX-100612-B	KX-100612-D	
	150	60	1.2	CX-150612-B	CX-150612-D	GX-150612-B	GX-150612-D	KX-150612-B	KX-150612-D	
	200	60	1.2	CX-200612-B	CX-200612-D	GX-200612-B	GX-200612-D	KX-200612-B	KX-200612-D	
	250	60	1.2	CX-250612-B	CX-250612-D	GX-250612-B	GX-250612-D	KX-250612-B	KX-250612-D	
	300	60	1.2	CX-300612-B	CX-300612-D	GX-300612-B	GX-300612-D	KX-300612-B	KX-300612-D	
	400	60	1.2	CX-400612-B	CX-400612-D	GX-400612-B	GX-400612-D	KX-400612-B	KX-400612-D	
	500	60	1.2	CX-500612-B	CX-500612-D	GX-500612-B	GX-500612-D	KX-500612-B	KX-500612-D	
	600	60	1.2	CX-600612-B	CX-600612-D	GX-600612-B	GX-600612-D	KX-600612-B	KX-600612-D	
Normal : 2000 mm (Standard) Special : 3000 mm	50	60	1.5	CX-050615-B	CX-050615-D	GX-050615-B	GX-050615-D	KX-050615-B	KX-050615-D	
	100	60	1.5	CX-100615-B	CX-100615-D	GX-100615-B	GX-100615-D	KX-100615-B	KX-100615-D	
	150	60	1.5	CX-150615-B	CX-150615-D	GX-150615-B	GX-150615-D	KX-150615-B	KX-150615-D	
	200	60	1.5	CX-200615-B	CX-200615-D	GX-200615-B	GX-200615-D	KX-200615-B	KX-200615-D	
	250	60	1.5	CX-250615-B	CX-250615-D	GX-250615-B	GX-250615-D	KX-250615-B	KX-250615-D	
	300	60	1.5	CX-300615-B	CX-300615-D	GX-300615-B	GX-300615-D	KX-300615-B	KX-300615-D	
	400	60	1.5	CX-400615-B	CX-400615-D	GX-400615-B	GX-400615-D	KX-400615-B	KX-400615-D	
	500	60	1.5	CX-500615-B	CX-500615-D	GX-500615-B	GX-500615-D	KX-500615-B	KX-500615-D	
	600	60	1.5	CX-600615-B	CX-600615-D	GX-600615-B	GX-600615-D	KX-600615-B	KX-600615-D	
Normal : 2000 mm (Standard) Special : 3000 mm	50	60	2	CX-050620-B	CX-050620-D	GX-050620-B	GX-050620-D	KX-050620-B	KX-050620-D	
	100	60	2	CX-100620-B	CX-100620-D	GX-100620-B	GX-100620-D	KX-100620-B	KX-100620-D	
	150	60	2	CX-150620-B	CX-150620-D	GX-150620-B	GX-150620-D	KX-150620-B	KX-150620-D	
	200	60	2	CX-200620-B	CX-200620-D	GX-200620-B	GX-200620-D	KX-200620-B	KX-200620-D	
	250	60	2	CX-250620-B	CX-250620-D	GX-250620-B	GX-250620-D	KX-250620-B	KX-250620-D	
	300	60	2	CX-300620-B	CX-300620-D	GX-300620-B	GX-300620-D	KX-300620-B	KX-300620-D	
	400	60	2	CX-400620-B	CX-400620-D	GX-400620-B	GX-400620-D	KX-400620-B	KX-400620-D	
	500	60	2	CX-500620-B	CX-500620-D	GX-500620-B	GX-500620-D	KX-500620-B	KX-500620-D	
	600	60	2	CX-600620-B	CX-600620-D	GX-600620-B	GX-600620-D	KX-600620-B	KX-600620-D	

Note: X refers to C: power Coated, P: pregalvanized, H: Hot dip galvanization, S: Stainless steel

Cable Tray Systems

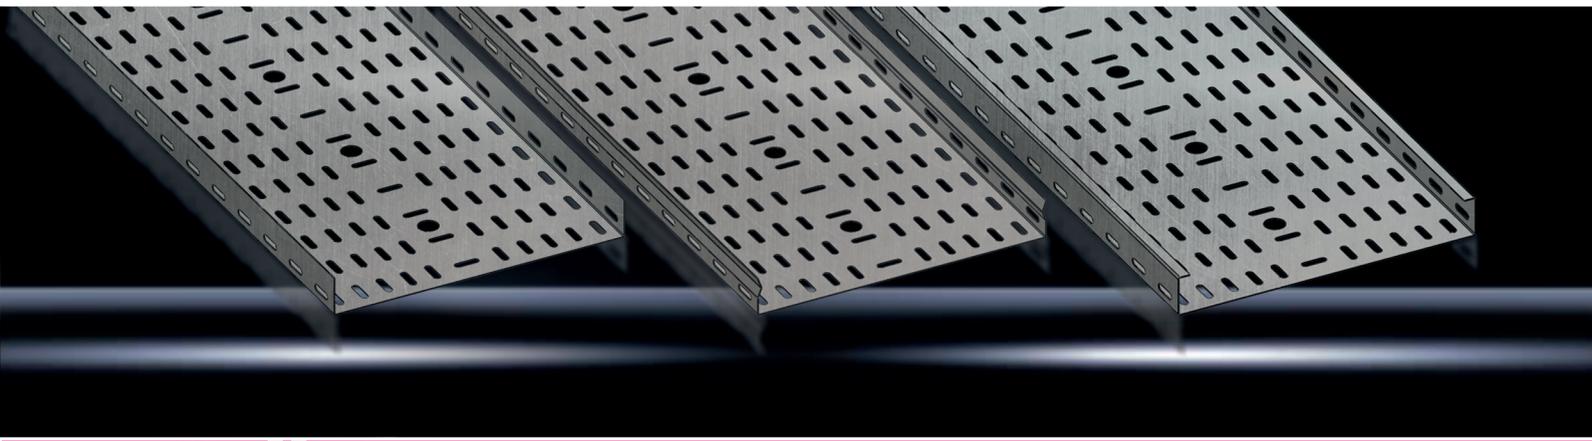


Photo shows a configuration example with equipment not included in the scope of supply.

Length ▼	NSP			C type		G type		K type		
	L (mm)	W (mm)	H (mm)	T (mm)	C type		G type		K type	
					Body	Door	Body	Door	Body	Door
Normal : 2000 mm (Standard) Special : 3000 mm	50	75	1	CX-057510-B	CX-057510-D	GX-057510-B	GX-057510-D	KX-057510-B	KX-057510-D	
	100	75	1	CX-107510-B	CX-107510-D	GX-107510-B	GX-107510-D	KX-107510-B	KX-107510-D	
	150	75	1	CX-157510-B	CX-157510-D	GX-157510-B	GX-157510-D	KX-157510-B	KX-157510-D	
	200	75	1	CX-207510-B	CX-207510-D	GX-207510-B	GX-207510-D	KX-207510-B	KX-207510-D	
	250	75	1	CX-257510-B	CX-257510-D	GX-257510-B	GX-257510-D	KX-257510-B	KX-257510-D	
	300	75	1	CX-307510-B	CX-307510-D	GX-307510-B	GX-307510-D	KX-307510-B	KX-307510-D	
	400	75	1	CX-407510-B	CX-407510-D	GX-407510-B	GX-407510-D	KX-407510-B	KX-407510-D	
	500	75	1	CX-507510-B	CX-507510-D	GX-507510-B	GX-507510-D	KX-507510-B	KX-507510-D	
	600	75	1	CX-607510-B	CX-607510-D	GX-607510-B	GX-607510-D	KX-607510-B	KX-607510-D	
Normal : 2000 mm (Standard) Special : 3000 mm	50	75	1.2	CX-057512-B	CX-057512-D	GX-057512-B	GX-057512-D	KX-057512-B	KX-057512-D	
	100	75	1.2	CX-107512-B	CX-107512-D	GX-107512-B	GX-107512-D	KX-107512-B	KX-107512-D	
	150	75	1.2	CX-157512-B	CX-157512-D	GX-157512-B	GX-157512-D	KX-157512-B	KX-157512-D	
	200	75	1.2	CX-207512-B	CX-207512-D	GX-207512-B	GX-207512-D	KX-207512-B	KX-207512-D	
	250	75	1.2	CX-257512-B	CX-250412-D	GX-257512-B	GX-257512-D	KX-257512-B	KX-257512-D	
	300	75	1.2	CX-307512-B	CX-307512-D	GX-307512-B	GX-307512-D	KX-307512-B	KX-307512-D	
	400	75	1.2	CX-407512-B	CX-407512-D	GX-407512-B	GX-407512-D	KX-407512-B	KX-407512-D	
	500	75	1.2	CX-507512-B	CX-507512-D	GX-507512-B	GX-507512-D	KX-507512-B	KX-507512-D	
	600	75	1.2	CX-607512-B	CX-607512-D	GX-607512-B	GX-607512-D	KX-607512-B	KX-607512-D	
Normal : 2000 mm (Standard) Special : 3000 mm	50	75	1.5	CX-057515-B	CX-057515-D	GX-057515-B	GX-057515-D	KX-057515-B	KX-057515-D	
	100	75	1.5	CX-107515-B	CX-107515-D	GX-107515-B	GX-107515-D	KX-107515-B	KX-107515-D	
	150	75	1.5	CX-157515-B	CX-157515-D	GX-157515-B	GX-157515-D	KX-157515-B	KX-157515-D	
	200	75	1.5	CX-207515-B	CX-207515-D	GX-207515-B	GX-207515-D	KX-207515-B	KX-207515-D	
	250	75	1.5	CX-257515-B	CX-257515-D	GX-257515-B	GX-257515-D	KX-257515-B	KX-257515-D	
	300	75	1.5	CX-307515-B	CX-307515-D	GX-307515-B	GX-307515-D	KX-307515-B	KX-307515-D	
	400	75	1.5	CX-407515-B	CX-407515-D	GX-407515-B	GX-407515-D	KX-407515-B	KX-407515-D	
	500	75	1.5	CX-507515-B	CX-507515-D	GX-507515-B	GX-507515-D	KX-507515-B	KX-507515-D	
	600	75	1.5	CX-607515-B	CX-607515-D	GX-607515-B	GX-607515-D	KX-607515-B	KX-607515-D	
Normal : 2000 mm (Standard) Special : 3000 mm	50	75	2	CX-057520-B	CX-057520-D	GX-057520-B	GX-057520-D	KX-057520-B	KX-057520-D	
	100	75	2	CX-107520-B	CX-107520-D	GX-107520-B	GX-107520-D	KX-107520-B	KX-107520-D	
	150	75	2	CX-157520-B	CX-157520-D	GX-157520-B	GX-157520-D	KX-157520-B	KX-157520-D	
	200	75	2	CX-207520-B	CX-207520-D	GX-207520-B	GX-207520-D	KX-207520-B	KX-2007520-D	
	250	75	2	CX-257520-B	CX-257520-D	GX-257520-B	GX-257520-D	KX-257520-B	KX-257520-D	
	300	75	2	CX-307520-B	CX-307520-D	GX-307520-B	GX-307520-D	KX-307520-B	KX-307520-D	
	400	75	2	CX-407520-B	CX-407520-D	GX-407520-B	GX-407520-D	KX-407520-B	KX-407520-D	
	500	75	2	CX-507520-B	CX-507520-D	GX-507520-B	GX-507520-D	KX-507520-B	KX-507520-D	
	600	75	2	CX-607520-B	CX-607520-D	GX-607520-B	GX-607520-D	KX-607520-B	KX-607520-D	

Note: X refers to C: power Coated, P: pregalvanized, H: Hot dip galvanization, S: Stainless steel

Cable Tray Systems

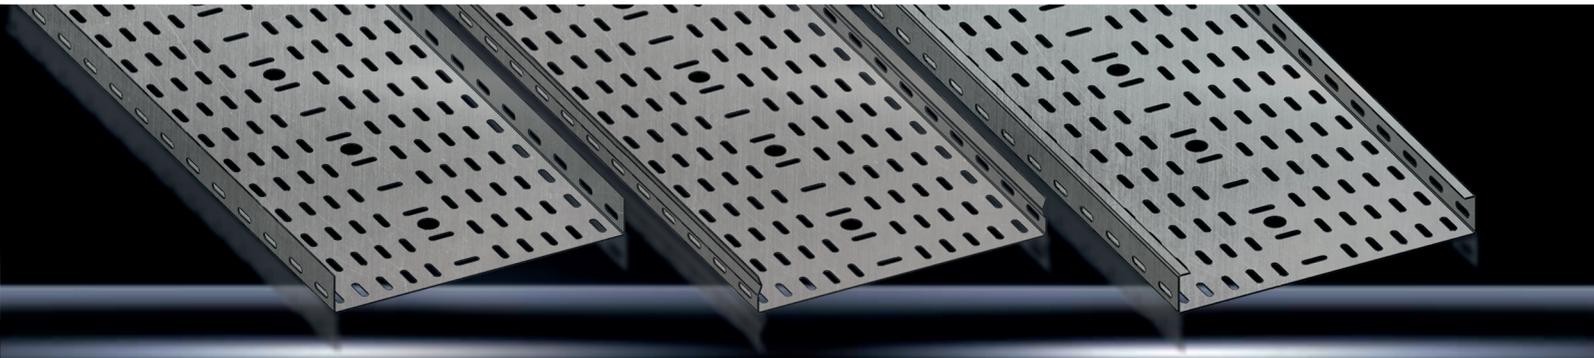


Photo shows a configuration example with equipment not included in the scope of supply.

Length ▼	NSP			C type		G type		K type		
	L (mm)	W (mm)	H (mm)	T (mm)	Body	Door	Body	Door	Body	Door
					C type		G type		K type	
Normal : 2000 mm (Standard) Special : 3000 mm	50	100	1	CX-051010-B	CX-051010-D	GX-051010-B	GX-051010-D	KX-051010-B	KX-051010-D	
	100	100	1	CX-101010-B	CX-101010-D	GX-101010-B	GX-101010-D	KX-101010-B	KX-101010-D	
	150	100	1	CX-151010-B	CX-151010-D	GX-151010-B	GX-151010-D	KX-151010-B	KX-151010-D	
	200	100	1	CX-201010-B	CX-201010-D	GX-201010-B	GX-201010-D	KX-201010-B	KX-201010-D	
	250	100	1	CX-251010-B	CX-251010-D	GX-251010-B	GX-251010-D	KX-251010-B	KX-251010-D	
	300	100	1	CX-301010-B	CX-301010-D	GX-301010-B	GX-301010-D	KX-301010-B	KX-301010-D	
	400	100	1	CX-401010-B	CX-401010-D	GX-401010-B	GX-401010-D	KX-401010-B	KX-401010-D	
	500	100	1	CX-501010-B	CX-501010-D	GX-501010-B	GX-501010-D	KX-501010-B	KX-501010-D	
Normal : 2000 mm (Standard) Special : 3000 mm	50	100	1.2	CX-051012-B	CX-051012-D	GX-051012-B	GX-051012-D	KX-051012-B	KX-051012-D	
	100	100	1.2	CX-101012-B	CX-101012-D	GX-101012-B	GX-101012-D	KX-101012-B	KX-101012-D	
	150	100	1.2	CX-151012-B	CX-151012-D	GX-151012-B	GX-151012-D	KX-151012-B	KX-151012-D	
	200	100	1.2	CX-201012-B	CX-201012-D	GX-201012-B	GX-201012-D	KX-201012-B	KX-201012-D	
	250	100	1.2	CX-251012-B	CX-251012-D	GX-251012-B	GX-251012-D	KX-251012-B	KX-251012-D	
	300	100	1.2	CX-301012-B	CX-301012-D	GX-301012-B	GX-301012-D	KX-301012-B	KX-301012-D	
	400	100	1.2	CX-401012-B	CX-401012-D	GX-401012-B	GX-401012-D	KX-401012-B	KX-401012-D	
	500	100	1.2	CX-501012-B	CX-501012-D	GX-501012-B	GX-501012-D	KX-501012-B	KX-501012-D	
Normal : 2000 mm (Standard) Special : 3000 mm	50	100	1.5	CX-051015-B	CX-051015-D	GX-051015-B	GX-051015-D	KX-051015-B	KX-051015-D	
	100	100	1.5	CX-101015-B	CX-101015-D	GX-101015-B	GX-101015-D	KX-101015-B	KX-101015-D	
	150	100	1.5	CX-151015-B	CX-151015-D	GX-151015-B	GX-151015-D	KX-151015-B	KX-151015-D	
	200	100	1.5	CX-201015-B	CX-201015-D	GX-201015-B	GX-201015-D	KX-201015-B	KX-201015-D	
	250	100	1.5	CX-251015-B	CX-251015-D	GX-251015-B	GX-251015-D	KX-251015-B	KX-251015-D	
	300	100	1.5	CX-301015-B	CX-301015-D	GX-301015-B	GX-301015-D	KX-301015-B	KX-301015-D	
	400	100	1.5	CX-401015-B	CX-401015-D	GX-401015-B	GX-401015-D	KX-401015-B	KX-401015-D	
	500	100	1.5	CX-501015-B	CX-501015-D	GX-501015-B	GX-501015-D	KX-501015-B	KX-501015-D	
Normal : 2000 mm (Standard) Special : 3000 mm	50	100	2	CX-051020-B	CX-051020-D	GX-051020-B	GX-051020-D	KX-051020-B	KX-051020-D	
	100	100	2	CX-101020-B	CX-101020-D	GX-101020-B	GX-101020-D	KX-101020-B	KX-101020-D	
	150	100	2	CX-151020-B	CX-151020-D	GX-151020-B	GX-151020-D	KX-151020-B	KX-151020-D	
	200	100	2	CX-201020-B	CX-201020-D	GX-201020-B	GX-201020-D	KX-201020-B	KX-201020-D	
	250	100	2	CX-251020-B	CX-251020-D	GX-251020-B	GX-251020-D	KX-251020-B	KX-251020-D	
	300	100	2	CX-301020-B	CX-301020-D	GX-301020-B	GX-301020-D	KX-301020-B	KX-301020-D	
	400	100	2	CX-401020-B	CX-401020-D	GX-401020-B	GX-401020-D	KX-401020-B	KX-401020-D	
	500	100	2	CX-501020-B	CX-501020-D	GX-501020-B	GX-501020-D	KX-501020-B	KX-501020-D	

Note: X refers to C: power Coated, P: pregalvanized, H: Hot dip galvanization, S: Stainless steel

Cable Ladder and Modules



INFO



Photo shows a configuration example with equipment not included in the scope of supply.

General Product Specifications

Material & Surface finish:

- C = Powder coating
- P = Pre-galvanized
- H = Hot Dip galvanization
- S = Stainless steel

Colour for C class :

- Normal RAL 7035 (Standard)
- Special RAL 7032



Also required for S class




Note: Special material can be stainless steel

- Enclosure: Stainless steel 1.4301(AISI 1.5 ,304 mm)
- Door or double door and console lid: Stainless steel 1.4301(AISI 2.0 ,304 mm)


Technical Information

Sample code for product :

LP-050415-B

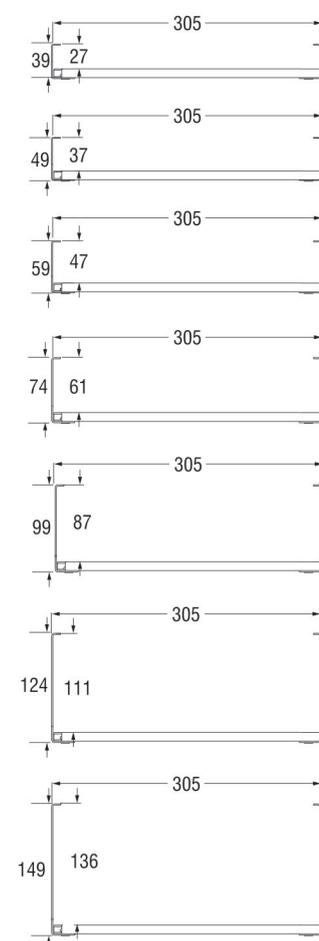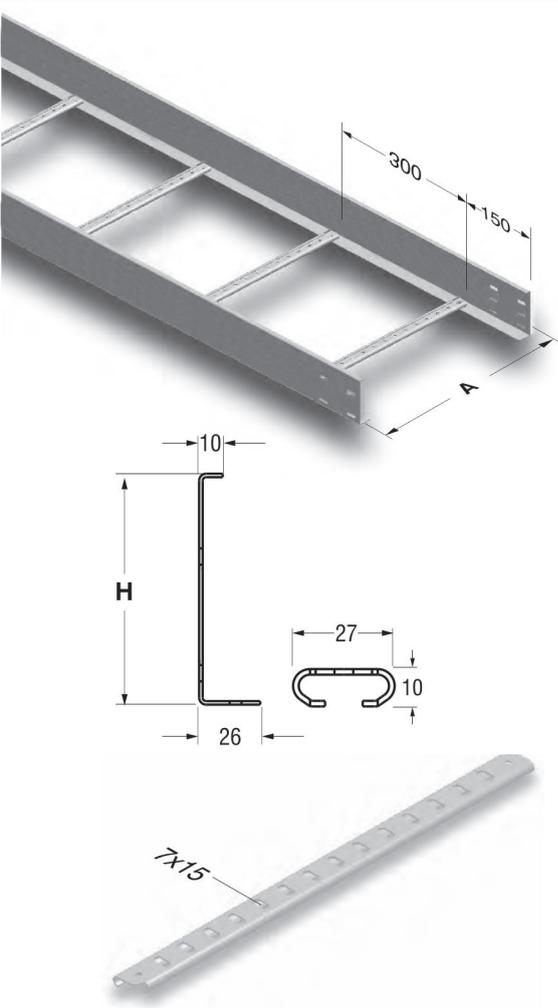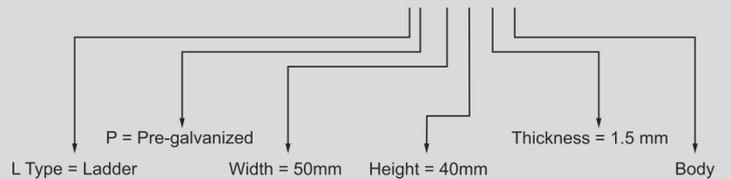

Catalogue Number Explanation

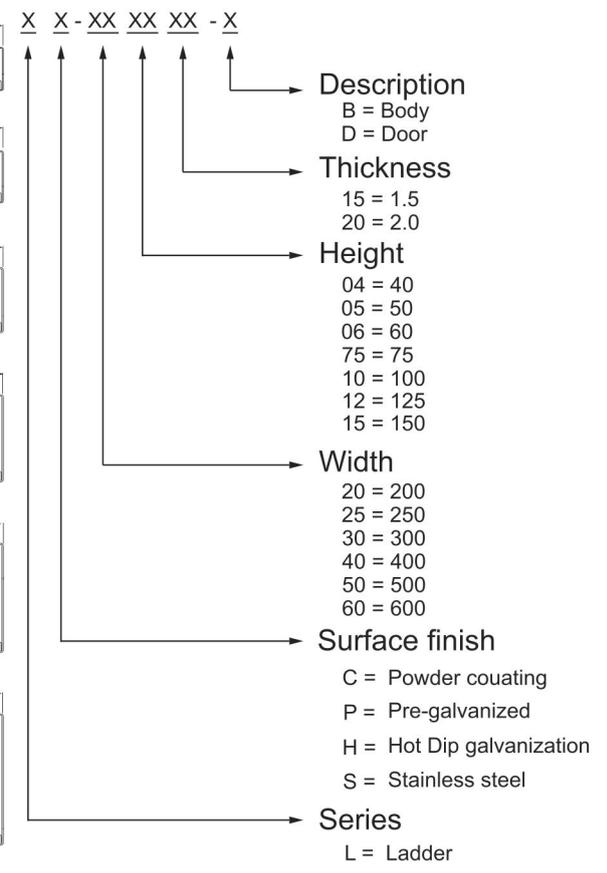

Cable Ladder Systems


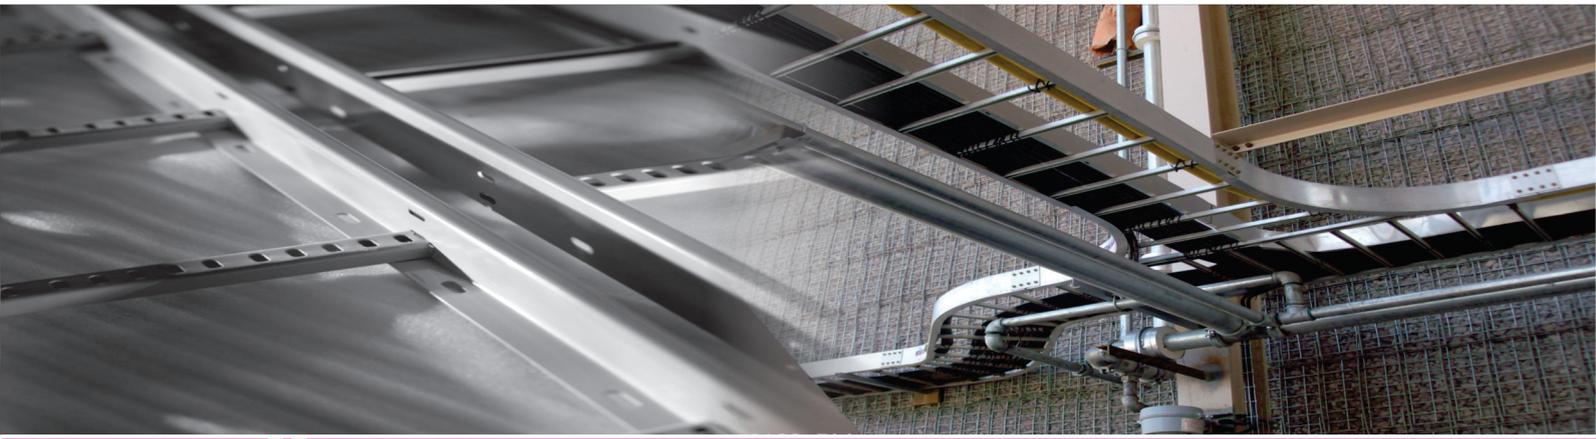


Photo shows a configuration example with equipment not included in the scope of supply.




Length ▼ L (mm)	NSP			L type = Ladder		T (mm)	L type = Ladder		
	W (mm)	H (mm)	T (mm)	Body	Door		Body	Door	
Normal : 2000 mm (Standard) Special : 3000 mm	200	40	1.5	LX-200415-B	LX-200415-D	Normal : 2000 mm (Standard) Special : 3000 mm	2	LX-200420-B	LX-200420-D
	300	40	1.5	LX-300415-B	LX-300415-D		2	LX-300420-B	LX-300420-D
	400	40	1.5	LX-400415-B	LX-400415-D		2	LX-400420-B	LX-400420-D
	500	40	1.5	LX-500415-B	LX-500415-D		2	LX-500420-B	LX-500420-D
	600	40	1.5	LX-600415-B	LX-600415-D		2	LX-600420-B	LX-600420-D
	200	50	1.5	LX-200515-B	LX-200515-D		2	LX-200520-B	LX-200520-D
	300	50	1.5	LX-300515-B	LX-300515-D		2	LX-300520-B	LX-300520-D
	400	50	1.5	LX-400515-B	LX-400515-D		2	LX-400520-B	LX-400520-D
	500	50	1.5	LX-500515-B	LX-500515-D		2	LX-500520-B	LX-500520-D
	600	50	1.5	LX-600515-B	LX-600515-D		2	LX-600520-B	LX-600520-D
	200	60	1.5	LX-200615-B	LX-200615-D		2	LX-200620-B	LX-200620-D
	300	60	1.5	LX-300615-B	LX-300615-D		2	LX-300620-B	LX-300620-D
	400	60	1.5	LX-400615-B	LX-400615-D		2	LX-400620-B	LX-400620-D
	500	60	1.5	LX-500615-B	LX-500615-D		2	LX-500620-B	LX-500620-D
	600	60	1.5	LX-600615-B	LX-600615-D		2	LX-600620-B	LX-600620-D
	200	75	1.5	LX-207515-B	LX-207515-D		2	LX-207520-B	LX-207520-D
	300	75	1.5	LX-307515-B	LX-307515-D		2	LX-307520-B	LX-307520-D
	400	75	1.5	LX-407515-B	LX-407515-D		2	LX-407520-B	LX-407520-D
	500	75	1.5	LX-507515-B	LX-507515-D		2	LX-507520-B	LX-507520-D
	600	75	1.5	LX-607515-B	LX-607515-D		2	LX-607520-B	LX-607520-D
	200	100	1.5	LX-201015-B	LX-201015-D		2	LX-201020-B	LX-201020-D
	300	100	1.5	LX-301015-B	LX-301015-D		2	LX-301020-B	LX-301020-D
	400	100	1.5	LX-401015-B	LX-401015-D		2	LX-401020-B	LX-401020-D
	500	100	1.5	LX-501015-B	LX-501015-D		2	LX-501020-B	LX-501020-D
	600	100	1.5	LX-601015-B	LX-601015-D		2	LX-601020-B	LX-601020-D
	200	125	1.5	LX-201215-B	LX-201215-D		2	LX-201220-B	LX-201220-D
	300	125	1.5	LX-301215-B	LX-301215-D		2	LX-301220-B	LX-301220-D
	400	125	1.5	LX-401215-B	LX-401215-D		2	LX-401220-B	LX-401220-D
	500	125	1.5	LX-501215-B	LX-501215-D		2	LX-501220-B	LX-501220-D
	600	125	1.5	LX-601215-B	LX-601215-D		2	LX-601220-B	LX-601220-D
200	150	1.5	LX-201515-B	LX-201515-D	2	LX-201520-B	LX-201520-D		
300	150	1.5	LX-301515-B	LX-301515-D	2	LX-301520-B	LX-301520-D		
400	150	1.5	LX-401515-B	LX-401515-D	2	LX-401520-B	LX-401520-D		
500	150	1.5	LX-501515-B	LX-501515-D	2	LX-501520-B	LX-501520-D		
600	150	1.5	LX-601515-B	LX-601515-D	2	LX-601520-B	LX-601520-D		

Note: X refers to C: power Coated, P: pregalvanized, H: Hot dip galvanization, S: Stainless steel




Cable Tray & Ladder Support & Accessories






Sample Order:
 Height (H): 40 mm,
 Width (A): 200 mm,
 Plating Type (P): Pre-Galvanized,
 Module Type: Convex Riser Module.

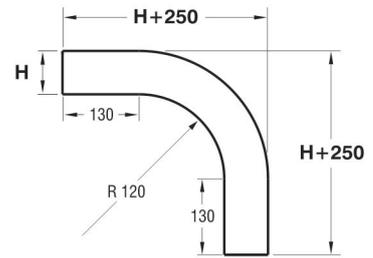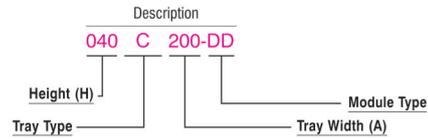




Sample Order:
 Height (H): 50 mm,
 Width (A): 500 mm,
 Plating Type (P): Pre-Galvanized,
 Module Type: Concave Riser Module.

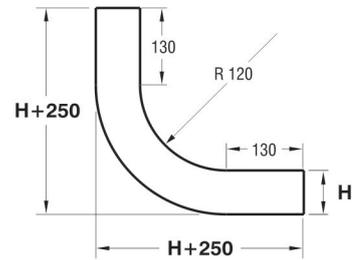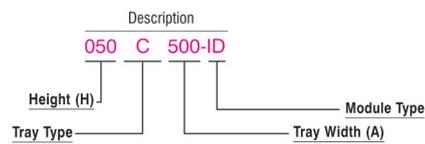



Sample Order:
 Height (H): 75 mm,
 Width (A,B): 500 mm,
 Plating Type (P): Pre-Galvanized,
 Module Type: Horizontal Elbow Module 90°

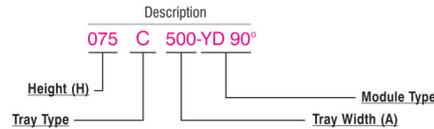

Sample Order:
 Height (H): 50 mm,
 Width (A,B,C,D): 400 mm,
 Plating Type (P): Pre-Galvanized,
 Module Type: Flat 4 Way Intersection Module

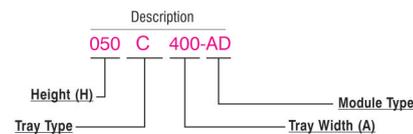




Sample Order:
 Height (H): 125 mm,
 Width (A): 500 mm,
 Plating Type (H): Hot Dip Galvanized,
 Module Type: Horizontal Elbow Module 135°

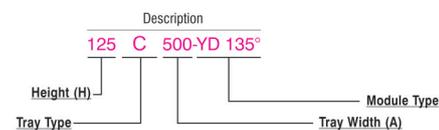


Cable Tray & Ladder Support & Accessories

Sample Order:


Height (H): 60 mm,
Width (A,B,C): 200 mm,
Plating Type (P): Pre-Galvanized,
Module Type: Flat Tee Module

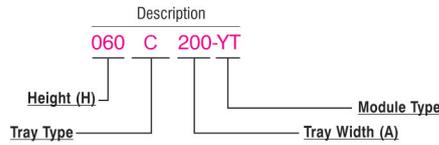

H=040, H=050, H=060 single row perforated
H=075 two rows perforated
H=100 three rows perforated.
H=125 four rows perforated.
H=150 five rows perforated.




40/50/60 KM-SDE L=160
75/100 KM-SDE L=180
125/150 KM-SDE L=180

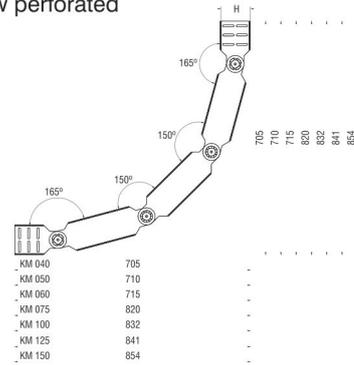




Level Adaptation Joint Set

4 units Grade Changing Component, 4 Units M6x12 Bolts,
4 units M6 Includes bolt nuts.



RD REDUCTION


Left and Right - hand Reduction

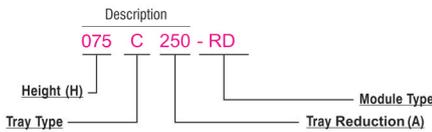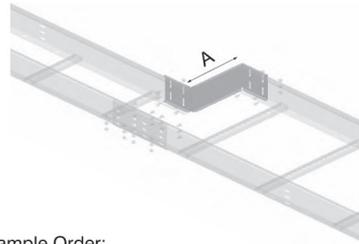



Sample Order:
Height (H): 75 mm,
Width (A): 25,50,100,150,200,250,300mm,
Plating Type (P): Pre-Galvanized,

Qty 1 H=40 Joint fitting; Qty 4 M6x12 bolts, Qty 4 M6 Nut must be used.
Qty 1 H=50 Joint fitting; Qty 4 M6x12 bolts, Qty 4 M6 Nut must be used.
Qty 1 H=60 Joint fitting; Qty 4 M6x12 bolts, Qty 4 M6 Nut must be used.
Qty 1 H=75 Joint fitting; Qty 8 M6x12 bolts, Qty 8 M6 Nut must be used.
Qty 1 H=100 Joint fitting; Qty 8 M6x12 bolts, Qty 8 M6 Nut must be used.
Qty 1 H=125 Joint fitting; Qty 8 M6x12 bolts, Qty 8 M6 Nut must be used.
Qty 1 H=150 Joint fitting; Qty 12 M6x12 bolts, Qty 12 M6 Nut must be used.

40 KM JOINT FITTING=210
50 KM JOINT FITTING=192
60 KM JOINT FITTING=210
75 KM JOINT FITTING=192
100 KM JOINT FITTING=192
125 KM JOINT FITTING=192
150 KM JOINT FITTING=192




H=040, H=050, H=060 single row perforated
H=075 two rows perforated
H=100 three rows perforated.
H=125 four rows perforated.
H=150 five rows perforated.

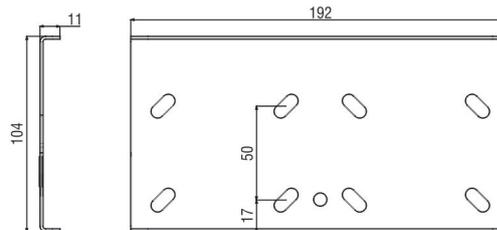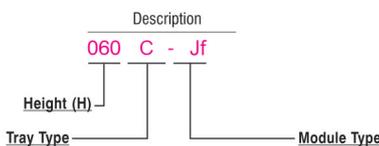



Sample Order:
Height (H): 60 mm,
Plating Type (P): Pre-Galvanized,

Cable Tray & Ladder Support & Accessories





Arm Tray Supports

Description	A (mm)	T (mm)	Weight (kg/pc)	Order Code
KTS 100	140	2	0,470	3004545
KTS 150	190	2	0,570	3004546
KTS 200	240	2	0,619	3004547
KTS 250	290	2	0,789	3004548
KTS 300	340	2	0,861	3004549
KTS 400	440	2	1,026	3004550
KTS 500	540	2	1,183	3004551
KTS 600	640	2	1,341	3004552

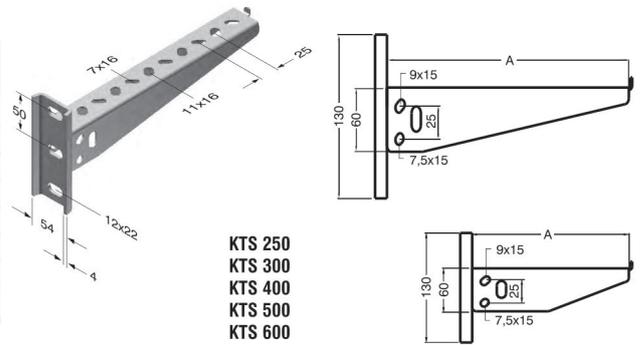




Arm Tray Supports

Description	T (mm)	A (mm)	Weight (kg/pc)	Order Code
KTS-D 100	140	2	0,507	3004553
KTS-D 150	190	2	0,617	3004554
KTS-D 200	240	2	0,671	3004555
KTS-D 250	290	2	0,756	3004556
KTS-D 300	340	2	0,836	3004557
KTS-D 400	440	2	1,017	3004558
KTS-D 500	540	2	1,190	3004559
KTS-D 600	640	2	1,364	3004560

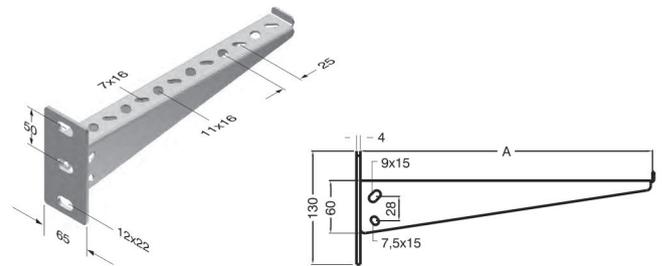



Tray Supports For Threaded Rods (Single)

Sample Order:
Height (H): 60 mm,
Width (A,B,C): 200 mm,
Plating Type (P): Pre-Galvanized,

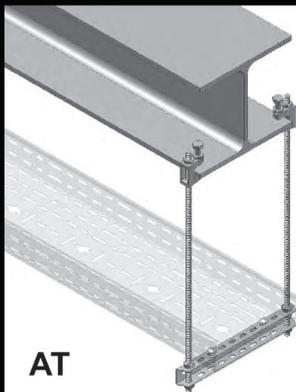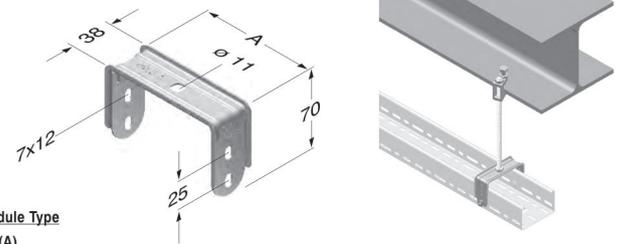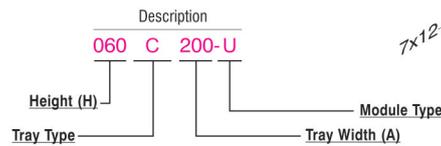

Tray Supports For Threaded Rods (dual)

Description	T (mm)	A (mm)	Weight (kg/pc)	Order Code
AT4 050	125	2	0,120	3007950
AT4 100	175	2	0,168	3007948
AT4 150	225	2	0,215	3007946
AT4 200	275	2	0,262	3007944
AT4 250	325	2	0,310	3007942
AT4 300	375	2	0,357	3007940
AT4 400	475	2	0,457	3007938
AT4 500	575	2	0,557	3007936
AT4 600	675	2	0,642	3005829
AT4 1000	1075	2	1,021	3007934

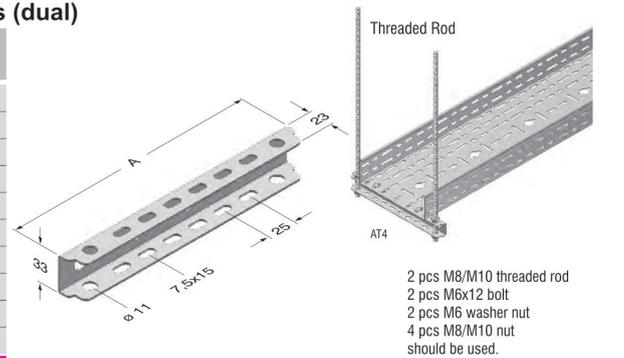

Omega Tray Supports

Description	H (mm)	A (mm)	T (mm)	Weight (kg/pc)	Order Code
Omega Console 1	40	100	2	0,150	3006359
Omega Console 2	40	200	2	0,205	3006371
Omega Console 3	40	300	2	0,262	3006373

* Cable tray containing union holes may be produced according to customer request.

